



The Portable POCKET PLUS-UFM

Fits in your pocket clamp-on ultrasonic flowmeter.



The POCKET PLUS-UFM is a light weight, truly pocket-sized instrument. Its intuitive menu driven user interface makes it incredibly easy to use. Its size and the layout of its display and keypad means that it can be operated single handed. Yet all of this is achieved with no compromise in measurement performance.

The POCKET PLUS-UFM includes integral datalogger and USB serial communications as standard.

It also incorporates wall thickness and heat quantity measurement functionality.



Made in Britain

Specification

- Pipe outer diameters ranging from 10 to 6500mm.
- Temperature range for pocket meter -10 to +65 degC.
- Weight 230g (including internal PP3 battery).
- Dimensions 185 x 85 x 25mm.
- IP65 enclosure.
- Full 128 x 68-pixel graphics display with backlight.
- Full 17 key tactile keypad with audio feedback.
- Integral wall thickness gauging, 2 to 24mm (requires optional wall thickness probe).
- Date and time stamped 4MB datalogger as standard. User selected interval from 1 to 255s.
- USB serial communications as standard.
- Battery life up to 24 hours continuous use on a standard 9V PP3 battery for easy replacement.

Features

- Light weight and small for easy, one-handed operation.
- Intuitive installation using menu driven user interface.
- Full set of instrument and measurement diagnostics.
- Signal oscilloscope for sensor positioning and diagnostics.
- Internal database of pipe, fluid and lining materials.
- Wall thickness gauging as standard (using optional wall thickness probe).
- Heat quantity measurement (if inlet and outlet temperatures are known).
- All measured values can be totalised.

- Ability to save up to 10 configurations for different measurement points.
- Meter can be powered from external USB charger of laptop for extended datalogging.


Performance

- Measurement principle ultrasonic transit time difference.
- Flow velocity range 0.01 to 25m/s.
- Resolution 0.25mm/s.
- Repeatability 0.15% of measured value.
- Accuracy +/- 1 to 3% of measured value depending on application, +/- 0.5% of measured value with process calibration against reference meter.
- Turn down ratio 1/100.
- Measurement rate 1Hz as standard.
- Gas/solids <10% of volume.

Quantity and units of measurement

- Flow velocity
- Volumetric flow rate
- Mass flow rate
- Energy flow rate
- Volume
- Mass
- Energy

Transducers

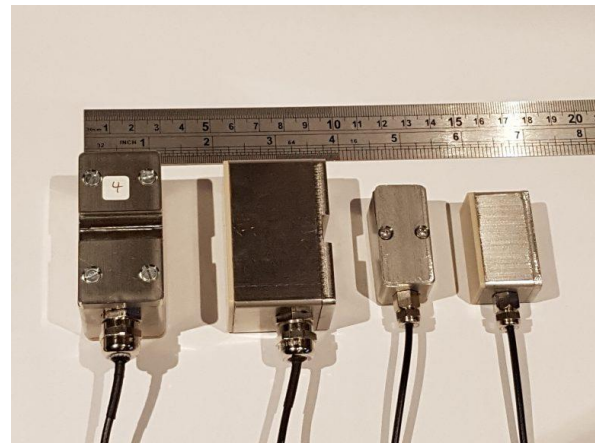

- 3 operating frequencies to cover the range of pipe outer diameter 10 to 6500mm.
- DM10, 1MHz for pipes of 25mm to 750mm.
- DS10, 1MHz for pipes of 50mm and over.
- DM20, 2MHz for pipes less than 25mm.
- DN40, 4MHz for pipes less than 15mm.
- Dimensions 60 x 30 x 35mm and 40 x 20 x 25 for locations with limited access.
- Material stainless steel and PEEK.
- Temperature range -10 to +80 degC.
- Ingress Protection rated IP66, with IP68 option.
- Cable length 1.5m as standard.
- Matched pairs for accurate zero flow measurement.
- 5MHz wall thickness probe.

For more information or to arrange a demonstration please contact Sonic Driver by email enquiries@sonic-driver.com, telephone +44(0)7971 273000 or by post at the address shown at the bottom of this page.

Copyright Sonic Driver Ltd 2023